

# Vintage 22 Manual



Model: V22

[www.vintagesoundamps.com](http://www.vintagesoundamps.com)



## Specifications

Power Output	22 Watts
Output Tubes	2 - 6L6
Preamp Tubes	2 - 12AT7; 4 - 12AX7
Rectifier	1 - 5AR4/GZ34
Controls	Front Panel: Channel 1: Voume.Treble.Bass Channel 2: Volume.Treble.Middle.Bass.Reverb.Speed.Intensity Rear Panel: Dwell Control on Rear Panel
Configurations	1x12 Cabinet Head & Matching 1x12 Speaker Cabinet
Colors	Assorted colors available
Dimensions & Weight	Combination Amp: Height: 16 7/8" Width: 24 3/16" Depth: 9 1/2" Weight: 39 lbs Head Cabinet: Height: 9 1/2" Width: 24 1/8" Depth: 8 5/8" Weight: 29 lbs 1x12 Speaker Cabinet: Height: 20" Width: 26" Depth: 10 3/4" Weight: 30 lbs  Various Speaker Cabinets available







This symbol warns the user of dangerous voltage levels localized within the enclosure.




This symbol advises the user to read all accompanying literature for safely operating the unit

### Before Operating Read These Important Safety Instructions

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this apparatus near water.
- 6) Clean only with dry cloth.
- 7) Do not block any ventilation openings. Maintain at least one (1) foot of distance around all sides of amplifier. Do not block any ventilation openings with items such as newspapers, tablecloths, curtains, etc.
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9) Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use attachments/accessories specified by the manufacturer.
- 12) Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) **CAUTION: Damage Requiring Service:** Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions: (a) When the power-supply cord or plug is damaged; (b) If liquid has been spilled, or objects have fallen into the product; (c) If the product has been exposed to rain or water; (d) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions. Improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation; (e) If the product has been dropped or damaged in any way; (f) When the product exhibits a change in performance - this indicates a need for service. • Replacement Parts: When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock, or other hazards.
- 15) Avoid placing any liquids on or near the amplifier that may splash or drip such as those contained in bottles, cans, glasses, etc.
- 16) Vintage Sound amplifiers are capable of producing very high sound pressure levels which can cause temporary or permanent hearing damage dropped.

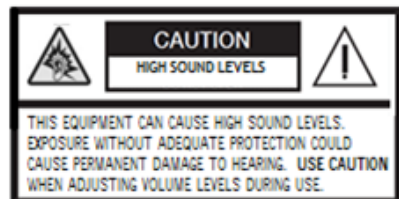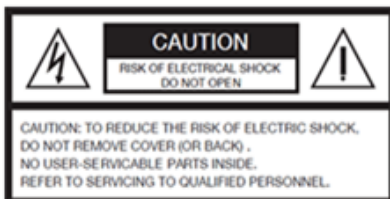


## FRONT PANEL

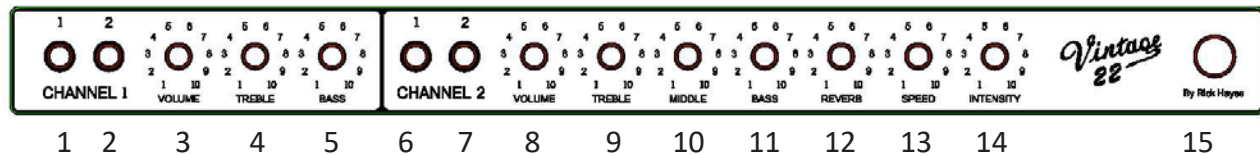

1. CHANNEL 1: 1 - First input jack for guitar
2. CHANNEL 1: 2 - Second input jack for guitar with a lower impedance
3. VOLUME/BRIGHT CONTROL - Controls loudness of amp. When pulled, control adds brilliance to all notes, especially higher frequency notes
4. TREBLE - Controls high frequency response, complemented by bright switch
5. BASS - Controls low frequency response.
6. CHANNEL 2: 1 - First input jack for guitar
7. CHANNEL 2: 2 - Second input jack for guitar with a lower impedance
8. VOLUME - Controls loudness of amp
9. TREBLE - Controls high frequency response, complemented by bright switch
10. MIDDLE - Controls (narrows) high and low frequency responses. Adds a rich tone and accents middle register.
11. BASS - Controls low frequency response.
12. REVERB - Adjusts the level of the Reverb effect. Reverb can be switched ON-OFF from the Footswitch. Used in conjunction with DWELL {26} on rear of chassis.
13. SPEED - Adjusts the rate of the Vibrato effect. Vibrato can be switched ON-OFF from the Footswitch
14. INTENSITY – Increases or decreases the Vibrato effect.
15. Power Indicator: Lights up when power is switched on. If bulb fails replace with type T47.

## REAR PANEL

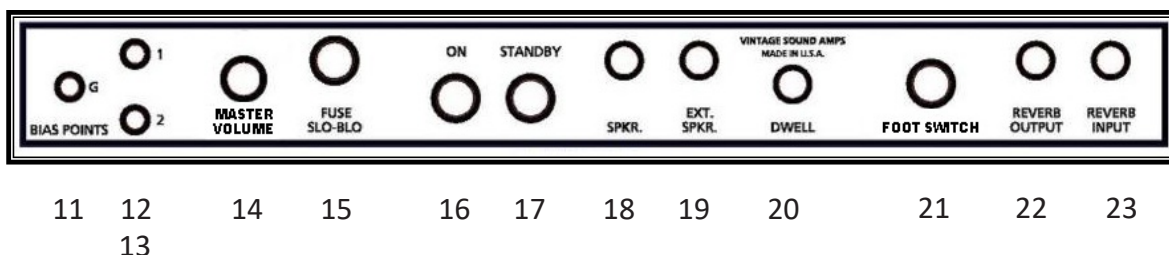

1. BIAS Ground. See NOTE below {13}.
2. BIAS Power Tube 1. See NOTE below {13}
3. BIAS Power Tube 2. See NOTE below:
 

**NOTE:** See Bias Adjustment Video for using features {11} through {13}:  
[www.vintagesoundamps.com](http://www.vintagesoundamps.com) Select [Media] tab; Select [Video] tab – go to video:  
**Video Tips: How to Bias your Vintage Sound Amp**
14. MASTER VOLUME - turns the **volume** control up to overdrive the preamps
15. FUSE SLO-BLOW - The fuse protects the amp from electrical faults. Replace only with a 1 amp slo blow fuse. *If the amp repeatedly blows the fuse, contact your dealer or Vintage Sound Amps.*
16. ON - This switch turns the AC power ON and OFF. When the switch is OFF, the amplifier is completely shut down

17. STANDBY - When the switch is in the STANDBY position, the amplifier is off; however, the tube filaments are left on as to eliminate warm-up time, provided that the POWER SWITCH (item B) is ON. Use of this feature during short breaks versus using the POWER SWITCH will increase tube life.
  18. SPKR - Plug-in connection for the 8Ω internal speaker. A speaker must always be connected at this jack when the amplifier is ON. A speaker impedance load of 8Ω should be used to avoid distortion or damage to the amplifier. When using only the internal speaker jack, a speaker impedance load of 8ohms (minimum) should be used to avoid distortion or damage to the amplifier.
  19. EXT SPKR – This is an auxillary speaker jack used to add an additional speaker cabinet to your amplifier. The EXT SPKR Cabinet can be no more than 8Ω.
  20. DWELL - The Dwell control is a second EQ to be used in conjunction with the REVERB {7} control on the front panel of the amplifier. With the Dwell control turned all the way down, there will be no reverb effect. With the Dwell control turned all the way up, there is full reverb effect. This control allows you to attenuate the reverb signal.
  21. FOOTSWITCH - The 2-button footswitch enables remote switching of the Reverb and Vibrato effects.
  22. REVERB OUTPUT - Plug the red reverb cable of the reverb tank in here.
  23. REVERB INPUT - Plug the white reverb cable of the reverb tank in here.
- Line Cord: This amplifier is equipped with a grounding type supply cord to reduce the possibility of shock hazard. Be sure to connect it to a grounded receptacle. **DO NOT ALTER THE AC PLUG.**

Vintage Sound Amps, Inc.  
www.vintagesoundamps.com

**CE**

## **EC/EU DECLARATION OF CONFORMITY**

We declare that the Vintage 22 is designed in conformity with the European Directives:

2014/30/EU	EMC Directive of 26 February
2011/65/EU	RoHS Directive of 8 June 2011
2014/35/EU	Electrical equipment designed for use within certain voltage limits

This declaration certifies compliance with the indicated directives but implies no warranty of properties. The safety instructions of the accompanying document shall be observed. This declaration of conformity is issued under the sole responsibility of the manufacturer.

Dated: 01/01/2019

*Ricky L Hayes*


---

Rick Hayes, President  
VINTAGE SOUND AMPS, INC.

MODEL: \_\_\_\_\_

SERIAL NUMBER: \_\_\_\_\_

INPUT VOLTAGE: \_\_\_\_\_

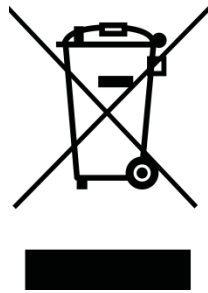

MADE IN USA





